



FORKLIFTS



1.5T - 5T DIESEL FORKLIFTS

PRODUCTIVITY

- ✓ Superior turning radius
- ✓ Smooth hydrostatic transmission
- ✓ Ease of operation
- ✓ Excellent visibility
- ✓ Fast cycling
- ✓ Driver comfort

DURABILITY

- ✓ Quality Kubota and Perkins engine
- ✓ USA design transmission
- ✓ Superior mast design

SERVICEABILITY

- ✓ Excellent accessibility
- ✓ Low maintenance



AWARENESS

- ✓ Superior visibility
- ✓ Clear fields of vision
- ✓ Double 'J' high rigidity
- ✓ High visibility mast
- ✓ Safety cage
- ✓ Excellent lighting

OPERATOR COMFORT

Adjustable steering wheel – Steering wheel can be adjusted by a lever on the right-hand side for the most comfortable operator position.

Easy and safe shift lever - A single lever on the left side of the steering column gives the operator fast, easy control of speed and direction. The engine can be started in case of neutral position of this lever.

Full Suspension Seat – An attractive and adjustable seat, based on a human engineering design, provides great comfort, safety and durability.



SPECIFICATION

Main Specifications

Characteristics	Model	DIESEL		NF15K-D	NF20K-D	NF35K-D	NF50K-D
	Designation			NF15K-P	NF20K-P	NF35K-P	NF50K-P
	Load capacity		kg	1500	2000	3500	5000
	Load centre		mm	500	500	500	500
	Service Weight		kg	2600	3600	4600	6600
Dimensions	Fork length		mm	2230	2620	2820	3154
Engine				KUBOTA V2403	KUBOTA V2403	KUBOTA V2403	KUBOTA 1104D-44TA

Standard Mast

STAGE FULL 3 FREE MAST	(Load capacity (Load Centre 500mm))(kg			
	NF15K	NF20K	NF35K	NF50P
	1400	1900	3300	4900
	1300	1850	3000	4700
	1250	1800*/1700	3000*/3000	4900
	1200	1800*/1700	3000*/3000	4600
	1250*	1750*/1500	2850*/2400	4500*/4400
	1200*	1700*/1200	2750*/1800	4300*/3300
	1050*	1600*/800	2200*/1300	4000*/2500



6T - 10T DIESEL FORKLIFTS




Main Specifications

			NF60	NF70	NF80	NF100
Characteristics	Load capacity	kg	6000	7000	8000	10000
	Service weight	kg	8840	9350	10960	12510
	Fork length	mm	1995	1995	2165	2165
	Manufacturer of engine		PERKINS 1104D-44TA	PERKINS 1104D-44TA	PERKINS 1104D-44TA	PERKINS 1104D-44TA

Standard Mast


	(Load capacity (Load Centre 600mm))(kg			
	NF60	NF70	NF80	NF100
STAGE FULL 3 FREE MAST	4500	5500	6000	6000

Short turning
radius

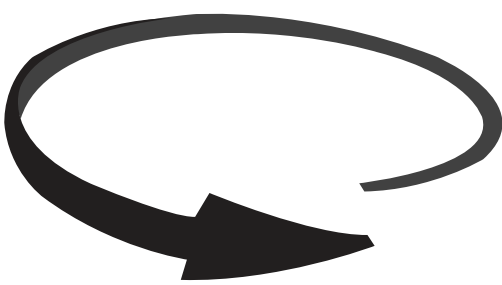

Mast tilt forward / backward

Double 'J' high Rigidity Mast High Visibility

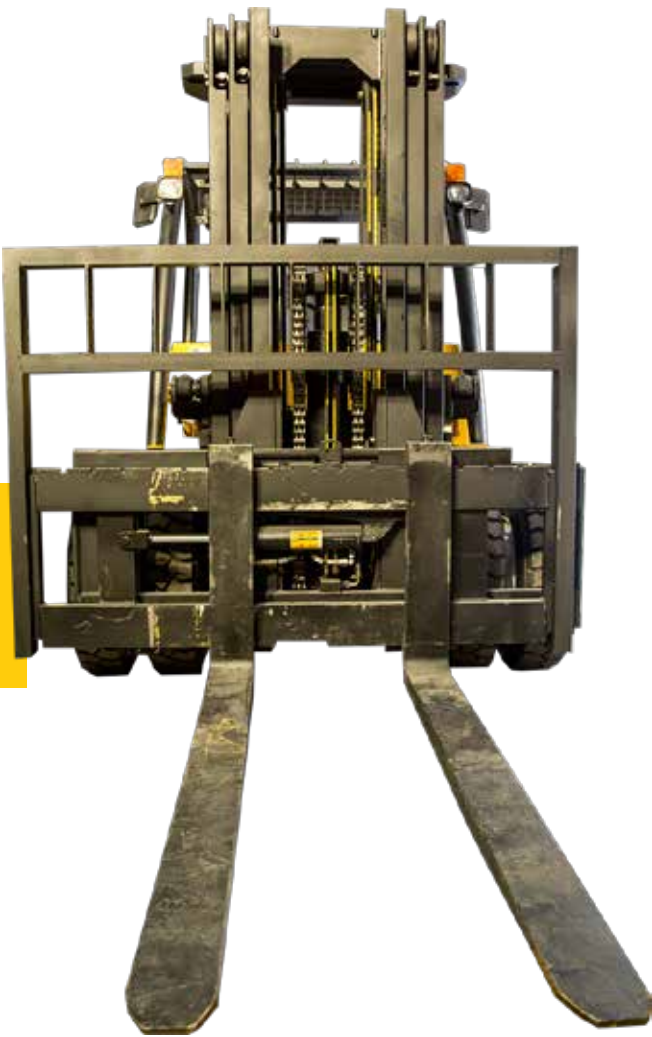

Auto electronic gear system Easy gear and
convenient operation



Hydraulic brake system
Quick response and high sensitivity



Hydraulic transmission Large torque
and high reliability



3.5T LPG/PETROL HYBRID FORKLIFTS



- Petrol/LPG
- Stage full free lift mast 3
- LDSJ Paper roll clamp 3000kg
- Indoor operations
- Mitsubishi engine
- Side shift
- Forks/Clumps 1200mm
- Lift height 4500mm
- 3500kg capacity


- Petrol/LPG
- Full free lift 3 stage mast
- Side shift
- Roll cab
- Mitsubishi engine
- Side shift
- Forks 1200mm
- Lift height 4500mm
- 3500kg capacity




Attachments for Forklifts please note that the units below are for illustration purpose only



SIDESHIFT



SIDESHIFTING FORK
POSITIONER



FORK POSITIONER



GENERAL PURPOSE
CLAMP



BALE CLAMP



ROTATING PALLET
FORK CLAMP



DUAL PALLET HANDLER



DRUM CLAMP




LOAD INVERTER



FREE STANDING LOAD
INVERTER




ROTATOR



180 DEGREE ROTATOR



"EXTENDAFORK"

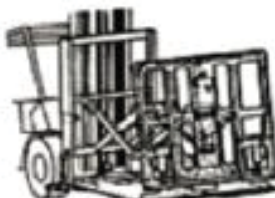

PUSH/PULL ATTACHMENT



SCOOP



LOAD STABILISER



TILTING CARRIAGE



CARPET PROBE



EXTENSION SLIPPERS



HOSE REEL




FORKS-HOOK TYPE




FORKS-PIN TYPE




KPF-PIVOT FRAME

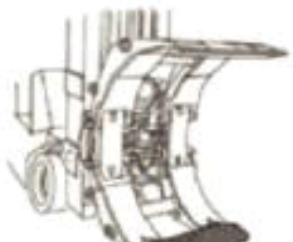


KPR PAPER ROLL CLAMPS

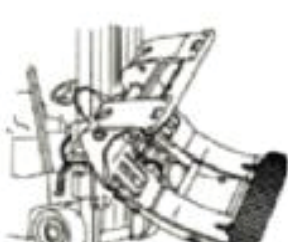

CPR-PIVOT FRAME

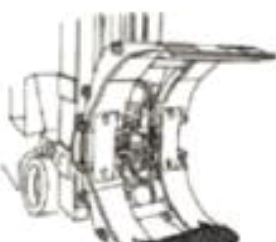

CPR-PAPER ROLL CLAMP

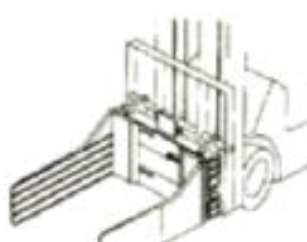

PULP BALE CLAMP



www.nyati.co.ke



HOTLINE
0706 565656



NYATI AFRICA



CUSTOMER CARE
0706 000056



ONLINE
nyati@nyati.co.ke
support@nyati.co.ke
www.nyati.co.ke

NAIROBI

MOMBASA

NAKURU

KISUMU

KAMPALA